
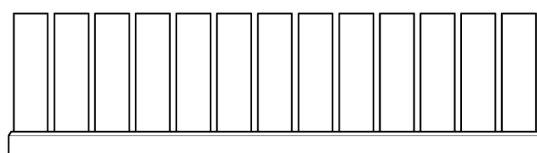
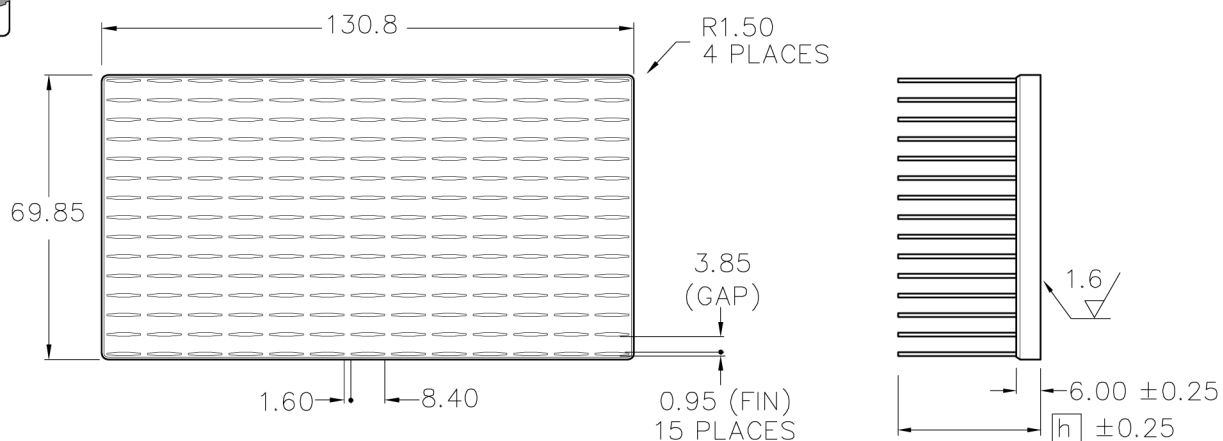



LPD70130



HEAT SINK
MATERIAL : A 6063
FINISH : BLACK ANODIZE

MODEL	HEIGHT h	WEIGHT (grams)
LPD70130-15B	15.0	178.0
LPD70130-20B	20.0	194.2
LPD70130-25B	25.0	210.4
LPD70130-30B	30.0	226.6
LPD70130-35B	35.0	242.8
LPD70130-40B	40.0	259.0


Dimensions : mm

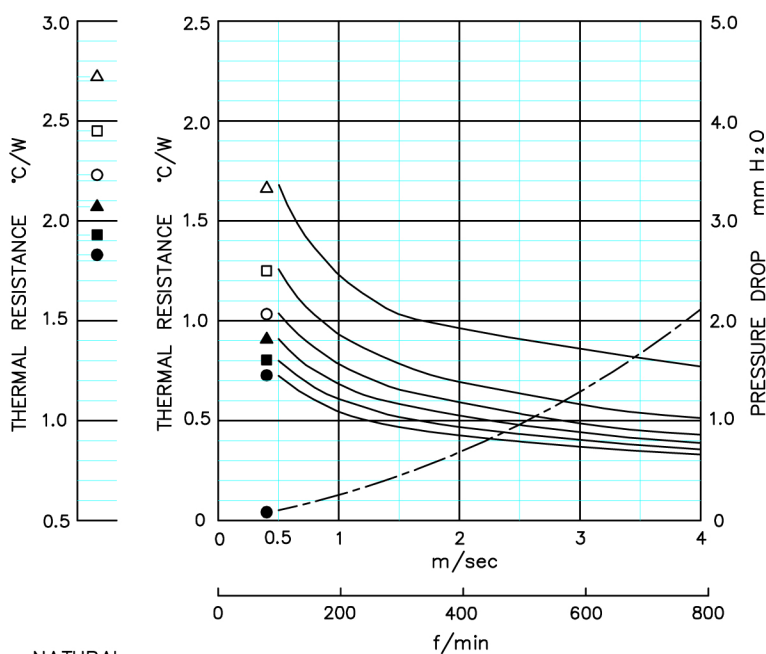

NATURAL CONVECTION

AIR VELOCITY: DUCTED CONDITION

- △ LPD70130-15B
 - LPD70130-20B
 - LPD70130-25B
 - ▲ LPD70130-30B
 - LPD70130-35B
 - LPD70130-40B
- DUCTED CONDITION
- DUMMY HEATER SIZE: 25.4 SQ
- THERMAL RESISTANCE _____
- PRESURE DROP _____
- NATURAL CONVECTION
- DUMMY HEATER SIZE: 25.4 SQ
- DISSIPATED POWER: 24(W)



NOTE ORIENTATION OF HEAT SINK USED
FOR NATURAL CONVECTION TESTING

■ BASED ON ALPHA'S STANDARD TEST PROCEDURE.
REFER TO TECHNICAL INFORMATION.