




REVISIONS			
REV	DESCRIPTION	BY	DATE

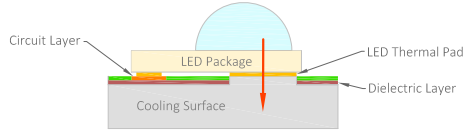

This SABER<sup>2</sup> LED module features COFAN USA's Pillar technology for a direct thermal path from the LED to the cooling surface

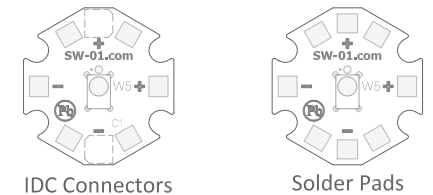

PCB Pads & Markings  
1:1

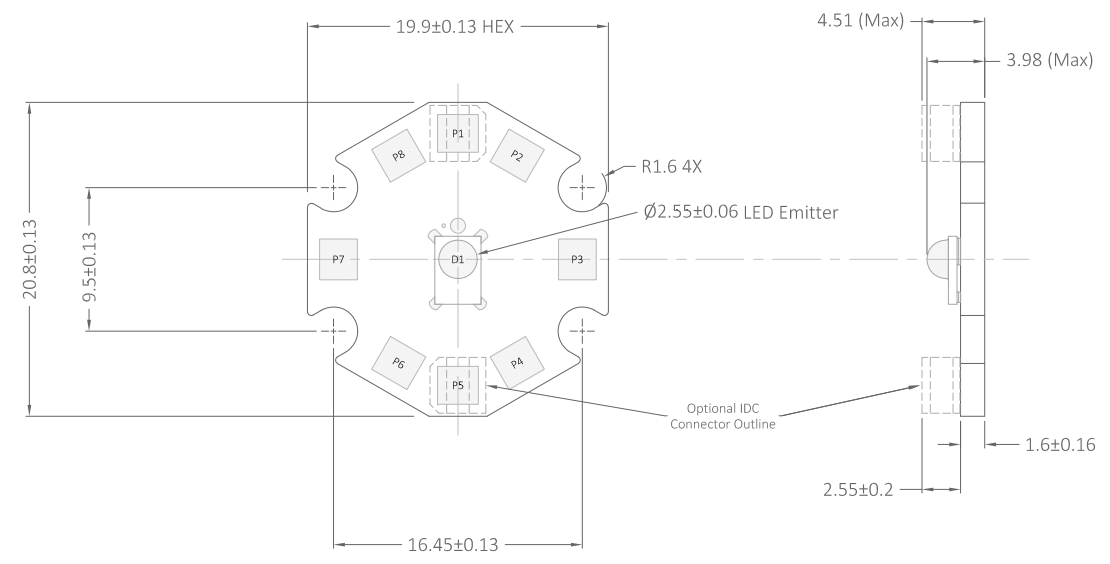

Scale 2:1

NOTES:

1. Base is a COFAN USA Pillar aluminum MCPCB with white soldermask and gold & black markings
2. Bottom of the MCPCB base is uncoated and electrically neutral.
3. Solder pads are ENIG plated.
4. The LED module must be mounted to a suitable heat sink with a thermally conductive interface material such as our pre-cut thermal adhesive tape. (Part LXT-S-12)
5. Thermally conductive double sided tape or epoxy is recommended for fastening the LED module to the cooling surface. Mechanical fasteners are not recommended. See the datasheet for additional details.
6. See the datasheet for instructions for determining LED junction temperature.
7. Solder pad locations are relative from the center of the module to the center of the solder pad.
8. See the datasheet for additional wiring connection details.
9. Optional AWG 26, 24 or 22 IDC connectors are soldered to pads P1 and P5.

Pad ID	X Loc	Y Loc	Rotation	Size
P1	0.0	8.3	0	2.7 x 2.5
P2	3.9	6.9	330	2.7 x 2.5
P3	7.9	0.0	0	2.7 x 2.5
P4	3.9	-6.9	30	2.7 x 2.5
P5	0.0	-8.3	0	2.7 x 2.5
P6	-3.9	-6.9	330	2.7 x 2.5
P7	-7.9	0.0	0	2.7 x 2.5
P8	-3.9	6.9	30	2.7 x 2.5



Connection Schematic  
(Note 8)

SCALE	As noted	DRAWN	RW	Jul 18/23	SOLDER PASTE	AIM NC-258
UNITS	MM	CHECKED	CW	Jul 31/23	REFLOW PROFILE	Standard
TOLERANCE	As noted	ISSUED/UPDATE	CW	Oct 28/23	QTY PER ARRAY	16



QTY	DESCRIPTION
1	SW-01 COFAN USA Pillar Aluminum MCPCB
1	LUXEON Rebel LED
2	AVX 00-9176-001-8X3-906 IDC Connector (Optional)

Luxeon Star LEDs  
service@luxeonstar.com / luxeonstar.com

PROJECT  
**SW-01 SABER<sup>2</sup> Rebel Star LED Module**

Quadica Developments Inc.

PART: SW-01-XX REV: A